

**Threading:** standard to ISO 262 / ISO 965-2


**Characteristic and performance tests:** ISO 2320 / ISO 3506-2

















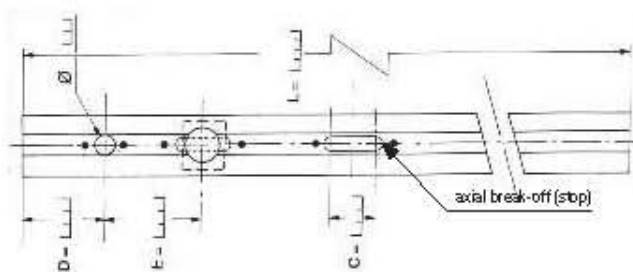



**Material:** stainless steel A2-70

**Surface treatment:** stainless steel - Antigalling : - Stanal ® 400  
(Standard to ROHS requirements) - Sherardisation

- Passivation

**Field of application:** contact us



<p><b>Ref. 201144</b></p>  <p><b>Materlat AISI 304 Z6 CN 1809</b></p>	<p>M3 to M5</p> 	<p>M3 to M5</p> <p>deflections</p> 	<p>M3 to M5</p> 	<p>M3 to M6</p> 
<p><b>Ref. 203010</b></p>  <p><b>Materlat AISI 304L Z2 CN 1810</b></p>	<p>M3 to M8</p> 	<p>M3 to M8</p> <p>deflections</p> 	<p>M3 to M8</p> 	<p>M3 to M8</p> 
<p><b>Ref. 203326</b></p>  <p><b>Materlat AISI 304L Z2 CN 1810</b></p>	<p>M6 to M12</p> 	<p>M6 to M12</p> <p>deflections</p> 	<p>M6 to M10</p> 	<p>M8 to M12</p> 
<p><b>Ref. 203048</b></p>  <p><b>Materlat AISI 304L Z2 CN 1810</b></p>	<p>M6 to M10</p> 	<p>M6 to M10</p> <p>deflections</p> 	<p>M6 to M8</p> 	<p>M6 to M12</p> 



### Ease of use:

- From 25 mm to 6 meters long
- Unlimited quantity of nuts and / or screws can be positioned within the channel
- Range of diameter for nuts and / or screws
- Range of type of nuts and/or screws (possible combination)
- Equidistance between products
- Internal technical setup (oval holes, lights, spring mounts, prepunched rivet holes)
- Channels may be manufactured straight, bent and / or curved.